

KA 4016 T/T IN TILT AND TURN / INWARD OPENING/ JULIET BALCONY

Our beautiful KA line is designed to give your project a minimalist look that highlights the exterior view rather than the system frames. Even with such minimal frames, they meet all hurricane safety standards.

Specifications

- Inward opening / till turn window and balcony door
- Works as an integral system with all KA products
- Thermally broken
- Hurricane resistant LMI/SMI
- Multi point lock system
- Internal hidden frame option
- Hidden Sash
- Hidden Hinges
- Bicolor Option



LMI Design

- Design load: 65 PSF
- Max Dimensions Single Window/Door:
 - 39" Width x 130" Height SGP
 - 40" Width x 108" Height PVB
- Glass:
- 1/4" HS + 0.09 SGP/PVB + 1/4" HS
- 1/4" T + 1/2" SPACER + 1/4" HS + 0.09 SGP/PVB+ 1/4" HS

SMI Design

- Design load 110 PSF
- Max Dimensions Single Window/Door: 49" Width x 108" Height
- Glass:
- ¼"T+0.060PVB+¼"T
- 1/4"T+1/2"SPACER +1/4"T+0.060PVB+1/4"T


Non Impact

- Design load 110 PSF
- Max Dimensions Single Window/Door: 39" Width x 108" Height
- · Glass:
- 1/4" HS + 1/2" SPACER + 1/4" HS

- Air infiltration: 6.27 PSF
- Water infiltration: 16.5 PSF

Our glass is certified by SGCC and IGCC, ensuring that our processes always deliver the highest quality

Thermal Performance Simulation

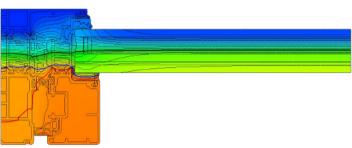


Type: Single Sash

Width: 38" Height: 130"


Glass: $\frac{1}{4}$ " Solarban 70 Clear + $\frac{1}{2}$ " Air Spacer + $\frac{1}{4}$ " Clear

• U Factor:


1.84 W/m²K 0.325 BTU / (h*ft^{2*0}F)

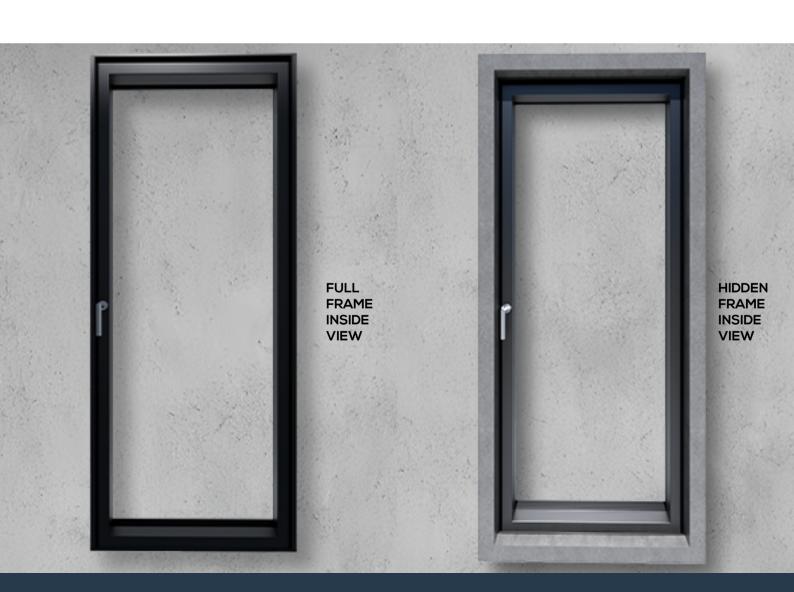


Vertical / Horizontal Section

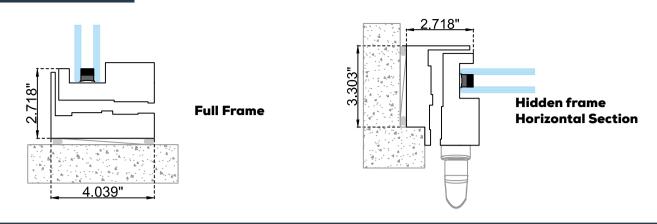

TYPES

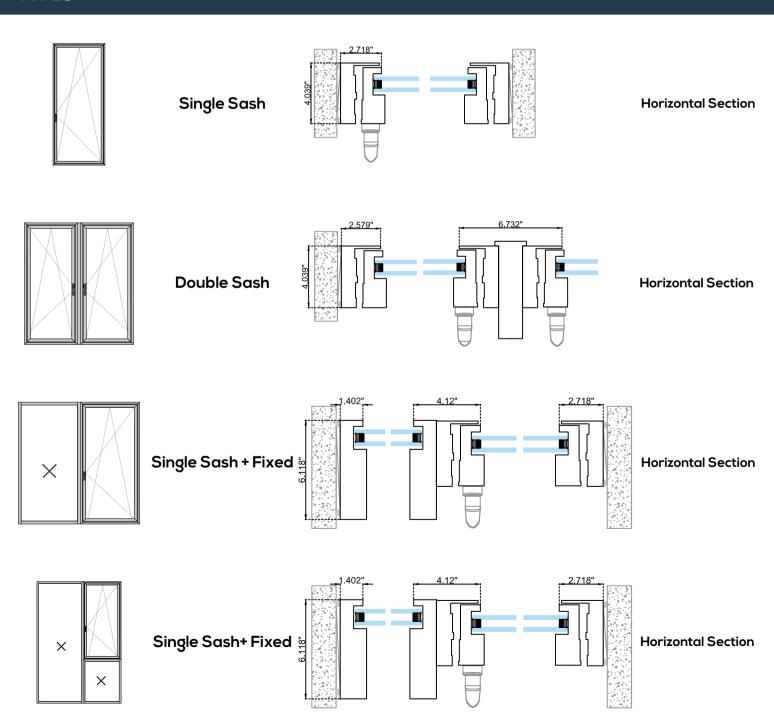

COLORS

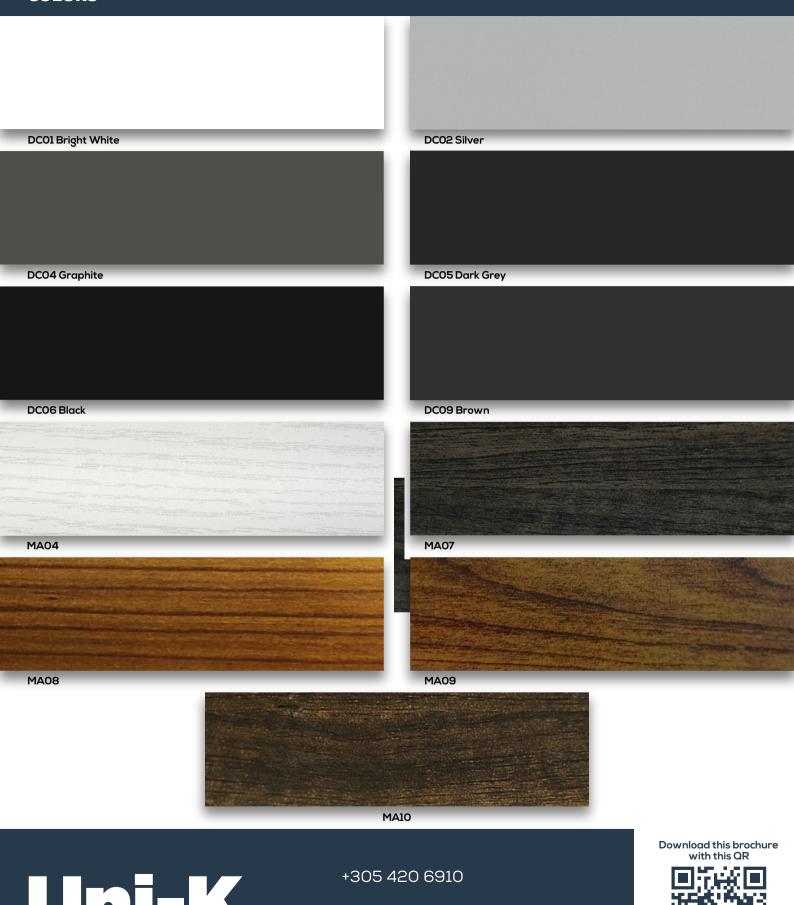

info@unik-windows.com

@ @unik.windows

or visit our website www.unik-windows.com